



# Floral

Floral was designed three years after Coral light, based on geometric polyhedra forms. Floral was designed to offer a softer more decorative offering alongside Coral which is more structured.

Floral is available in various sizes to suit any space. The plywood finish can be either raw bamboo or painted, offering a range of options.





#### **Features**

#### **Shipped Kitset**

Seed System kitset lightshades are on average 1/30th of the volume of the assembled light. This aims to help minimize the effects of shipping and to reduce the design's environmental footprint.

#### Warranty

This light is warranted for three years from date of purchase for failure of parts.

#### **Care Instructions**

All lights are intended for use in dry interior conditions only and can be cleaned with a soft cloth dampened slighty in warm water when the light is switched off. Do not use detergents.

#### **EPD Certified**

An EPD is a standardised and verified way of quantifying the environmental impacts of a product, based on a consistent set of rules that have been developed through a stakeholder consultation process.



THE INTERNATIONAL EPD® SYSTEM

Compliance



CE



AS/NZS

(Declarations of conformity available on request).







### Technical Data













Material

Suspension


400mm/16"	600mm/24"	800mm/31"	1000mm/39"	1200mm/47"	1600mm/63"
Diameter: 400mm / 16"	Diameter: 600mm / 24"	Diameter: 800mm / 31"	Diameter: 1000mm / 39"	Diameter: 1200mm / 47"	Diameter: 1600mm / 63"
Weight: 0.4kg / 0.88lb	Weight: 1kg / 2.20lb	Weight: 1.5kg / 3.30lb	Weight: 2.3kg / 5.07lb	Weight: 3.8kg / 8.37lb	Weight: 9kg / 19.84lb
2m / 6.5ft	2m / 6.5ft	2m / 6.5ft	3m / 9.8ft	5m / 16.4ft	5m / 16.4ft
Bamboo plywood (Sourced from FSC accredited factory)	Bamboo plywood (Sourced from FSC accredited factory)	Bamboo plywood (Sourced from FSC accredited factory)	Bamboo plywood (Sourced from FSC accredited factory)	Bamboo plywood (Sourced from FSC accredited factory)	Bamboo plywood (Sourced from FSC accredited factory)
Nylon	Nylon	Nylon	Nylon	Nylon	Aluminium
Hangs on cord	Hangs on cord	Hangs on cord	1x Suspension Wire	1xSuspension Wire	1xSuspension Wire
290mm x 170mm x 85mm 11" x 7" x 3" 0.004m <sup>3</sup> / 0.141ft <sup>3</sup> 0.7kg / 1.54lb	385mm x 215mm x 105mm 15" x 8" x 4" 0.009m³ / 0.317ft³ 1.4kg / 3.00lb	500mm x 280mm x 100mm 20" x 11" x 4" 0.014m <sup>3</sup> / 0.494ft <sup>3</sup> 2.3kg / 5.1lb	400mm x 310mm x 125mm 16" x 12" x 5" 0.016m <sup>3</sup> / 0.565ft <sup>3</sup> 3.2kg / 7.1lb	365mm x 425mm x 125mm 14" x 17" x 5" 0.019m <sup>3</sup> / 0.671ft <sup>3</sup> 4.2kg / 9.25lb	470mm x 395mm x 180mm 19" x 16" x 7" 0.033m <sup>3</sup> / 1.165ft <sup>3</sup> 9.5kg / 20.94lb


<sup>\*</sup>Black comes with black cordset and fasteners. All others come with white cordset and white fasteners. Custom lengths available on request.

### Finishes


We offer 12 stock finish options for Floral. We use low VOC acrylic paint and it is most commonly used on the interior of the light. We can also produce lights in other finishes or colours by special order. All lights are made from sustainably grown bamboo plywood sourced from an FSC accredited factory.



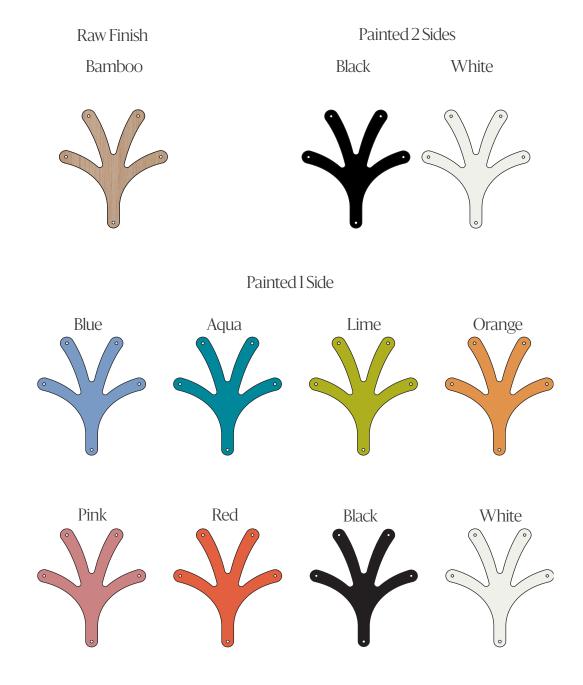


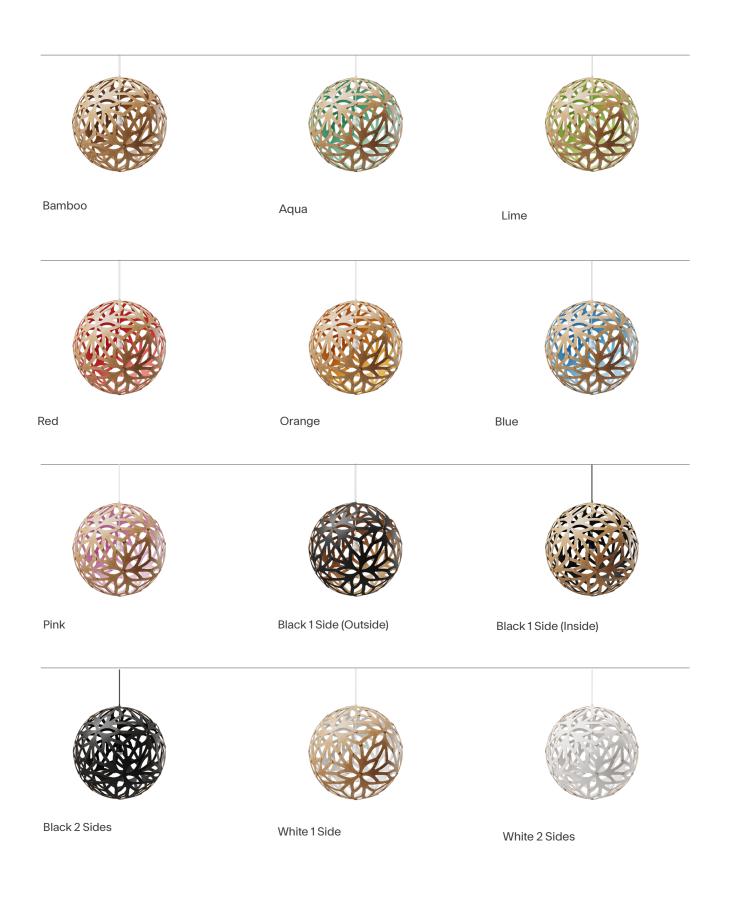

### **Electrics**

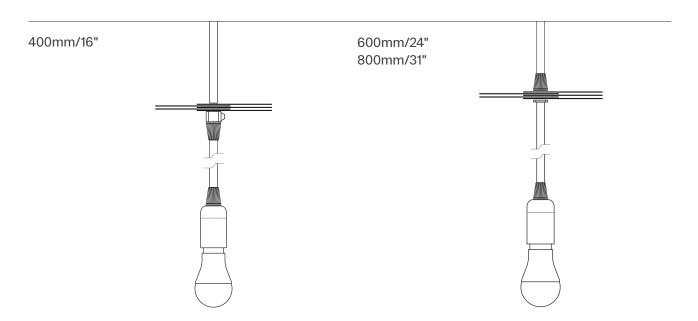

North America: E26, Max 60 Watts 120v AC 60hz Rest of World: E27, Max 60 Watts 230-240v AC 50hz North America: E26, Max 60 Watts 120v AC 60hz Rest of World: E27, Max 60 Watts 230-240v AC 50hz



North America: E26, Max 60 Watts 120v AC 60hz Rest of World: E27, Max 60 Watts 230-240v AC 50hz

### Installation

1000mm/39" 1200mm/47" 1600mm/63"


Fixings for cone gripper (fixing screws NOT SUPPLIED).

Note: Choose appropriate hardware to attach base plate (Fig.1) to ceiling substrate.

6mm/ 1/4" Ø max.



9mm/ 3/8" Ø max. Fig 1. Base Plate

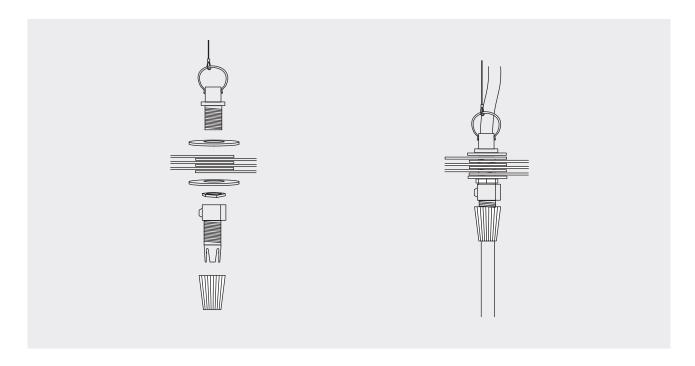


Follow the order of each component in diagram. Adjust the bulb / lamp to mid way in the pendant lightshade shown in Step 2 and then tighten.



Step 2.
Unscrew baseplate.



Step 3.
Use appropriate fixing screw to mount base plate (Fig.1).



Remove cable from cone. Screw cone back onto baseplate. Re-insert cable and level light. Once desired position is set, trim excess cable.

## ) david trubridge

davidtrubridge.com
David Trubridge Studio
Hawke's Bay, New Zealand
info@davidtrubridge.com
+ 64 6 650 0204

Certified





